



# TANSEL

## STAINLESS STEEL BOTTOM MOUNT BASKET

### INSTALLATION INSTRUCTIONS FOR BOTTOM MOUNT SLIDES 2 X 14.5mmW

Bottom Mount with hooks, full extension ball bearing, zinc plated

Weight capacity 20-40kgs\*




#### GENERAL CARE

Stainless steel wire basket: wipe with warm soapy water.

Zinc plated slides: Keep slides dry and wipe down with damp cloth and then wipe them dry. Avoid contact with water and other corrosive materials. If you require stainless steel slides, please contact us for a quote.

Note: The screws provided are suited to 16mm timber/melamine board. Please use alternative screw for other surfaces.

- These slides are for fixed shelf cabinets. If you are mounting to an adjustable shelf, you will need to lock it down.
  - Minimum width = basket width + slides 29mm (ie, 2 x 14,5mm).
  - Minimum height = basket height + slide bottom gap 20mm
- \* Standard weight capacity 20kgs but if fitted with thread, washer and self-locking nut, you can store up to 40kgs.

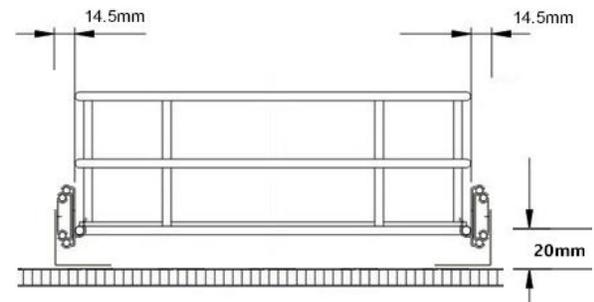


### STEP BY STEP INSTALLATION INSTRUCTIONS



**STEP 1:** Place slides on a fixed shelf (if adjustable you will need to lock it down).



**STEP 2:** Place basket onto the slides. Position it 3 spaces back from the front (as pictured). You can clip them into the hooks,

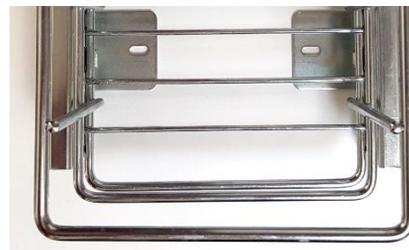

**STEP 3:** Position the basket on the shelf as you require. Using a pencil mark the screw holes on each slide. Drill holes and screw into position.

**STEP 4:** If adjustment is required, loosen the screws and adjust in the slotted holes.

### TROUBLE SHOOTING TIPS



1. Set back (the closer to the front the better), but position according to your needs.
2. Checking if "square" – measure your screws the distance between all screws, including diagonal, they should be equal distance.
3. Slides feel "tight": check that slides are "square" and parallel.

**Thank you for choosing Tansel**